




s.r.l. **ever**

 **STAFER**

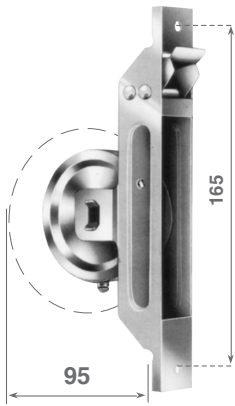

«S» 5 M

- Avvolgitore a semincasso «S» 5 m
- Halbeinlassgurtwickler «S» 5 m
- Halfembedded coiler «S» 5 m
- Enrouler à encastrer «S» 5 m


025.A.05.20

non caricato

025.A.0C.20

con molla caricata

Spessore telo	14 mm	9 mm
H max	2,50 m	2,50 m
Ø max pul	220	200
Cintino	22x1,7	22x1,7

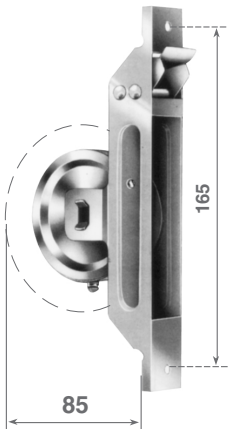

«S» 5 M A MINIMO INGOMBRO INT.165

- Avvolgitore a semincasso «S» 5 m
- Halbeinlassgurtwickler «S» 5 m
- Halfembedded coiler «S» 5 m
- Enrouler à encastrer «S» 5 m

025.S.05.20

non caricato

025.S.0C.20

con molla caricata

Spessore telo	14 mm	9 mm
H max	2,50 m	2,50 m
Ø max pul	220	200
Cintino	20x1,2	20x1,2